

K-No.:26917

1A Differential Current Sensor for 5V Supply Voltage

For the electronic measurement of current:
DC, AC, pulsed ..., with galvanic isolation between
the primary and the secondary circuit


Date: 18.02.2022
Customer: Standard type
Customers Part no:
Page 1 of 3

| Description | Characteristics | Applications |
|---|--|---|
| <ul style="list-style-type: none"> Closed loop (compensation) Current Sensor with magnetic probe Printed circuit board mounting Casing and materials UL-listed | <ul style="list-style-type: none"> excellent accuracy very low offset current very low temperature dependency and offset drift very low hysteresis of offset current short response time wide frequency bandwidth compact design reduced offset ripple | Mainly used for stationary operation in industrial applications: <ul style="list-style-type: none"> Solar inverter |

Electrical data - Ratings

| | | | |
|----------------------------------|---|---|---|
| I_{PN} | Primary nominal RMS current | 120 | A |
| $I_{\Delta N}$ | Differential rated RMS current | 1.0 | A |
| V_{OUT} | Output voltage @ $I_{\Delta P}$ | $V_{REF} \pm (1.2 * I_{\Delta P} / I_{\Delta N})$ | V |
| $V_{OUT(0)}^1$ | Output voltage @ $I_P=0A$, $\theta_A=25^\circ C$ | $V_{REF} \pm 0.015$ | V |
| $V_{OUT(\text{Error})}$ | in case of error (current sensor) $V_{OUT} < 0.5V$ is set | < 0.5 | V |
| V_{REF} | internal reference voltage | 2.5 ± 0.005 | V |
| | external reference voltage range | 1.4...3.5 | V |
| $V_{REF(\text{test current})}^2$ | Reference voltage (external) | 0 ... 0.1 | V |
| $V_{OUT(\text{test current})}^2$ | Output voltage @ $V_{REF} = 0...0.1V$ | $V_{OUT(0)} + 0.25 \pm 0.06$ | V |
| K_N | Transformation ratio | 1 : 1 : 1 : 1000 | |
| | Turns count for test winding | 20 | |

¹ with switching on and after "test current" the sensor is degaussed by an internal AC-current for about 110ms.

In this time the output is set to $V_{OUT} < 0.5V$.

² If V_{REF} is set external to 0...0.1V an internal test current is generated.

| | Accuracy – Dynamic performance data | min. | typ. | max. | Unit |
|------------------------------|--|-------------|-------------|-------------|-------------|
| $I_{\Delta P,max}$ | Max. measuring range (differential current) | ± 1.7 | | | A |
| X | Accuracy @ I_{PN} , $\theta_A = 25^\circ C$ | | 1.5 | | % |
| ϵ_L | Linearity | | 1 | | % |
| V_O | Offset voltage @ $I_P = 0A$, $\theta_A = 25^\circ C$ | | 15 | | mV |
| $\Delta V_O / \Delta \theta$ | Temperature drift of V_{OUT} @ $I_P=0A$, θ_A | 0.08 | | | mV/°C |
| t_r | Response time @ 90% of $I_{\Delta N}$ | 40 | | | μs |
| f | Frequency bandwidth | DC...10 | | | kHz |

General data

| | | | | |
|------------|---|------|-----|------|
| θ_A | Ambient operation temperature | -40 | 85 | °C |
| θ_S | Ambient storage temperature (acc. to M3101) | -40 | 85 | °C |
| m | Mass | | 175 | g |
| V_C | Supply voltage | 4.75 | 5 | 5.25 |
| I_C | Supply current at $I_P = 0A$ and RT | | 15 | mA |

| | | | | |
|---------------------------------|--|----|------|------------|
| ¹⁾ s_{clear} | Clearance (component without solder pad) | 12 | | mm |
| ¹⁾ s_{creep} | Creepage (component without solder pad) | 13 | | mm |
| ¹⁾ $U_{sys, re}$ | System Voltage (reinforced insulation) | | 600 | V_{RMS} |
| ¹⁾ $U_{work, re}$ | Working voltage (reinforced insulation) | | 1000 | V_{RMS} |
| ¹⁾ U_{PD} | Rated discharge voltage | | 1414 | V_{PEAK} |
| ¹⁾ $U_{sys, basic}$ | System Voltage (basic insulation) | | 1500 | V_{RMS} |
| ¹⁾ $U_{work, basic}$ | Working voltage (basic insulation) | | 2500 | V_{RMS} |

¹⁾Constructed and manufactured and tested in accordance with IEC 61800-5-1:2007

Insulation material group 1, Pollution degree 2, Overvoltage category III

| Date | Name | Issue | Amendment | | | |
|----------------------|--------------|-------|--|--|--|--------------|
| 18.02.2022 | NSch. | 81 | Other instructions on sheet 3 changed. "The color of the plastic material... added. Minor change | | | |
| Editor: R&D-PD NPI D | Designer: DJ | | MC-PM: NSch. | | | Released: SB |

K-No.:26917

1A Differential Current Sensor for 5V Supply Voltage

For the electronic measurement of current:
DC, AC, pulsed ..., with galvanic isolation between
the primary and the secondary circuit



Date: 18.02.2022




Customer: Standard type

Customers Part no:

Page 2 of 3

Mechanical outline (mm):

General tolerances DIN ISO 2768-c

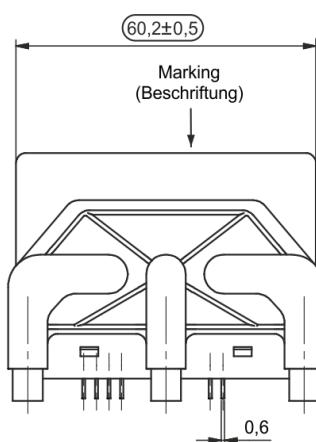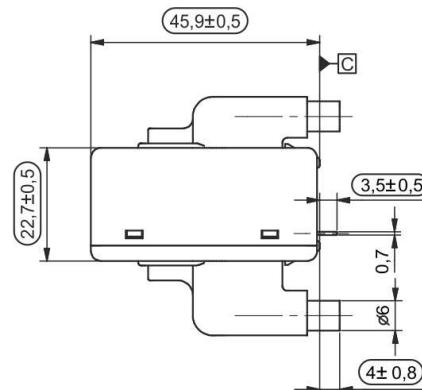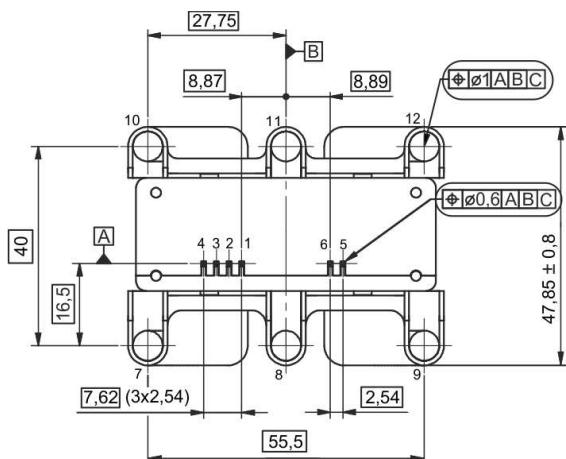


DC = Date Code test dimension
F = Factory

Marking:

VAC
UL-sign
4647-P981
F DC

Format DC: YYWW

Schematic diagram:

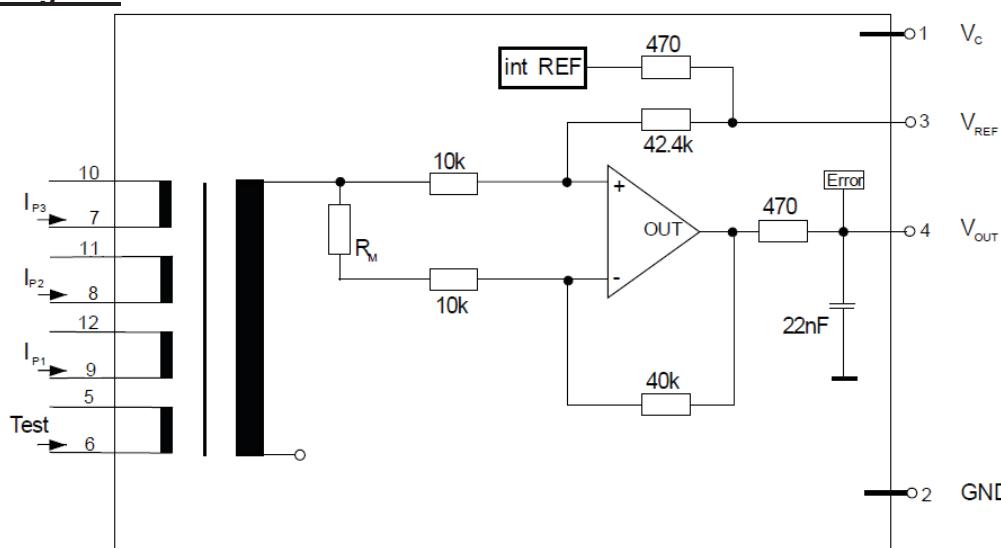

Editor: R&D-PD NPI D

Designer: DJ

MC-PM: NSch.

Released: SB

K-No.:26917

1A Differential Current Sensor for 5V Supply Voltage

For the electronic measurement of current:
DC, AC, pulsed ..., with galvanic isolation between
the primary and the secondary circuit


Date: 18.02.2022
Customer: Standard type
Customers Part no:
Page 3 of 3
Electrical data: (investigate by a type checking) **min.** **typ.** **max.** **Unit**

| | | | | |
|--|---|---|-----------|-------|
| $V_{C,max}$ | maximum supply voltage (without function) | 6 | V | |
| I_c | Supply current with primary current | $16mA + I_{\Delta P} * K_N + V_{OUT}/R_L$ | mA | |
| $I_{OUT,SC}$ | Short circuit output current | ± 20 | mA | |
| R_s | Secondary coil resistance @ $\theta_A = 85^\circ C$ | 55 | Ω | |
| R_p | Resistance of primary conductor @ $\theta_A = 25^\circ C$ | 0.07 | $m\Omega$ | |
| $R_{i,REF}$ | Internal resistance of reference input | 470 | Ω | |
| $R_{i,OUT}$ | Output resistance of V_{OUT} | 470 | Ω | |
| $\Delta X_\theta/\Delta \theta$ | Temperature drift of X @ $\theta_A = -40^\circ C \dots 85^\circ C$ | 400 | ppm/K | |
| $\Delta V_{REF}/\Delta \theta$ | Temperature drift of V_{REF} @ $\theta_A = -40^\circ C \dots 85^\circ C$ | 5 | 50 | ppm/K |
| $\Delta V_o = \Delta(V_{OUT}-V_{REF})$ | Sum of any offset drift included: | 30 | mV | |
| V_{ot} | Long term drift of V_o | 10 | mV | |
| V_{oe} | Temperature drift of V_o @ $\theta_A = -40^\circ C \dots 85^\circ C$ | 10 | mV | |
| $\Delta V_o/\Delta V_c$ | Supply voltage rejection ratio | 20 | mV/V | |
| V_{OH} | Hysteresis of V_{OUT} @ $I_p = 0$ (after an overload of $800x I_{\Delta N}$) | 125 | 250 | mV |
| $V_{OH, Demag}$ | Hysteresis after Degaussing | 40 | | |
| V_{OSS} | Offsetripple (without external filter) | 150 | mV | |
| V_{OSS} | Offsetripple (with 20 kHz-Filter, first order) | 25 | mV | |
| V_{OSS} | Offsetripple (with 1.6 kHz-Filter, first order) | 10 | mV | |
| | Mechanical stress according to M3209/3 | 2 | | |
| | Settings: 10-2000Hz, 1min/Octave, 2 hours | | g | |

Routine Tests: (Measurement after temperature balance of the samples at room temperature, SC=significant characteristic)

| | | | | |
|------------------------------|-------------------|--|---------------|------------|
| V_{OUT} (SC) | (100%) M3011/6: | Output voltage | 1182 ... 1218 | mV |
| V_o | (100%) M3226: | Offset voltage | ± 15 | mV |
| U_d | (100%) M3014: | Test voltage, 1s | 1.8 | kV_{RMS} |
| U_{PDE} $U_{PDE}*1.875$ | (AQL 1/S4) M3024: | Partial discharge voltage (extinction) | 1.5 1.875 | kV_{RMS} |

Type Tests: (Precondition acc. M3236)

| | | | | |
|------------------------------|-------|---|--------------|------------|
| \hat{U}_w | M3064 | HV Impulse voltage (1.2 μ s/50 μ s wave form) 5 pulses -> polarity +, 5 pulses -> polarity - | 8 | kV |
| U_d | M3014 | Test voltage, 60s | 3.6 | kV_{RMS} |
| U_{PDE} $U_{PDE}*1.875$ | M3024 | Partial discharge voltage (extinction) | 1.5 1.875 | kV_{RMS} |

Other instructions

- A positive output voltage appears at point V_{OUT} vs. V_{REF} , if primary current flows in direction of the arrow.
- Temperature of the primary conductor should not exceed $105^\circ C$.
- Housing and bobbin material UL-listed: Flammability class 94V-0.
- Housing without red phosphorous
- Further standards: UL 508, file E317483, category NMTR2 / NMTR8
- The color of the plastic material is not specified and the current sensor can be supplied in different colors (e.g. brown, black, white, natural). This has no effect on the specifications or UL approval

Editor: R&D-PD NPI D

Designer: DJ

MC-PM: NSch.

Released: SB